

MIEN2016

16-port 100M rack-mount unmanaged Industrial Ethernet Switch

Product description

MIEN2016 is an Industrial Ethernet Switch designed and developed for industrial high-speed communication network applications. The switch is mainly used for simple application in plug and play. All copper ports support auto-negotiation, Auto-MDI/MDI-X and other functions. It makes industrial communications smoother, more reliable and faster, which meets the needs of customers to innovate to increase value-added applications. It supports AC and DC 220V power supply and also supports wide range of DC and AC power inputs.



Features:

- Support 16x10/100M copper ports.
- Support indicator status display.
- Connect and use, convenient and fast.
- Support industrial power supply.
- Industrial grade wide temperature design, fanless heat conduction design.
- Meet the application requirements of harsh industrial environments.

Product specification

Technical parameters

Protocol Standard	IEEE802.3(Ethernet)、 IEEE802.3u (100Base-TX&100Base-FX)、 IEEE802.3x (Flow Control)
-------------------	---

Switch capability

MAC Table Size	8k
Backplane bandwidth	8.8Gbps
Switch Delay	<5μs

Interface

100M port	Number:16
	Connector: RJ45 10/100M TX port
	Baud rate: Self-adaption 10/100Mbase-TX
Terminal block for power input	5.08mm terminal block

Communication distance

Twisted-pair	100m(CAT5/CAT5e cable)
--------------	------------------------

LED indicator lights

Front panel LED lights	Port light: LINK/ACT; SPEED
	System work light: RUN
	Power status light: PWR

Power

Input power	AC/DC220V(85-264VAC/110-370VDC)
Power consumption	<25W@(MAX)
Overload protection	Support
Reverse protection	Support

Working Environment


Operating Temperature	-40°C~85°C
Storage temperature	-40°C~85°C
Ambient Humidity	5%~95%

Physical Characteristics

Shell	IP40 protection, aluminum alloy shell
Installation	Standard 19-inch rack mounting,

Dimension	482.6mm×44mm×210mm (W×H×D)
Industry standard	
EMC	EN61000-4-2(ESD), Level 4 EN61000-4-3(RS), Level 4 EN61000-4-4(EFT), Level 4 EN61000-4-5(Surge), Level 4 EN61000-4-6(CS), Level 4 EN61000-4-8, Level 5
Impact	IEC60068-2-27
Falling	IEC60068-2-32
Shock	IEC60068-2-6
Warranty	
Warranty	5 Years
Certification	
Certification	CE, FCC, RoHS

Dimensional drawing

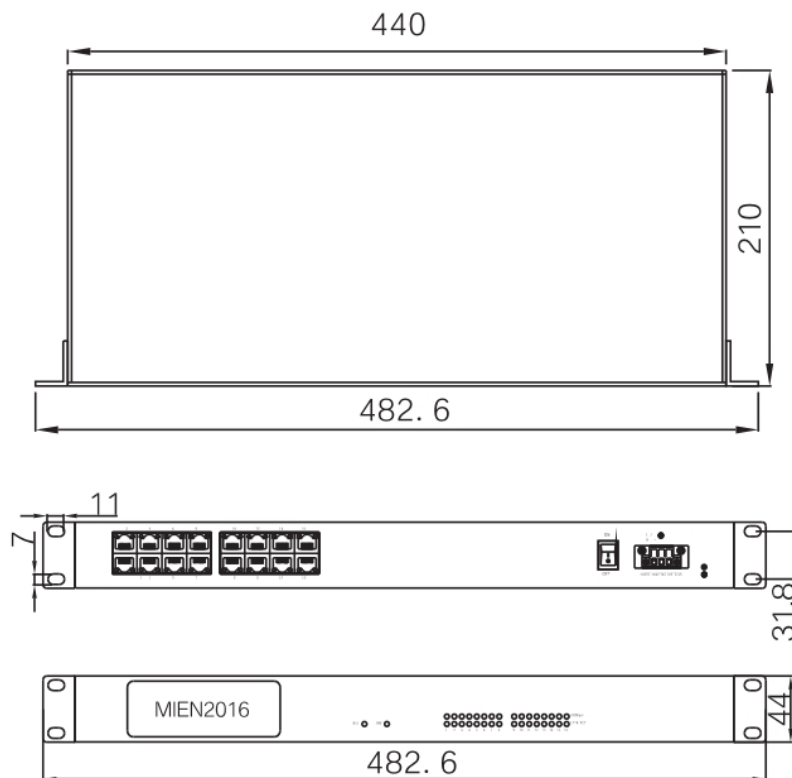

Rack mount (unit: mm)

Ordering Information

MIEN2016-AD220

16 10/100M Tx ports, layer 2 rack-mounted industrial Ethernet switch, single AC85-264V/ DC110~370V isolate power supply.